

Part No. 99-0026

RL 75

Hydropneumatic tool for installation of lockbolt pins and collars and structural blind rivets

Scope of use:

Type of rivet	SRB (Lockbolt) Standard		SRB (Lockbolt) Multigrip		Hucktainer Plus	Blind rivets
	5	6/6.4	5	6.4		
Ø of the rivet	5	6/6.4	5	6.4	10	6.4*
Aluminium	✓	✓	✓	✓		✓
Steel	✓	✓	✓	✓	✓	✓
Stainless	✓	✓				✓

*structural blind rivets: TIBULB, M-LOCK, MAGNA-BULB, HUCKLOCK etc.


Technical parameters:

Model	RL 75
Pulling Force	22 kN / 6 bar
Working Stroke	16 mm
Weight	2.2 kg
Force / Weight Ratio	10 kN/kg
Length	235 mm
Height	319 mm
Air Consumption	2.8 litres / rivet
Working Air Pressure	5–7 bar
Hose Connection	Ø 6 mm (G 1/4")




Description:

- high output
- speed damper
- removable collecting container or rubber boot
- low noise
- low maintenance
- simple operation
- ergonomic handle is comfortable to hold
- low transferred vibrations
- rotating air joint connection
- air intake can be moved to suit either left or right handed operator
- balancer hook
- safety over-pressure dump valve
- reliability verified in practice
- non slip base
- base cover prevents damage to workpiece

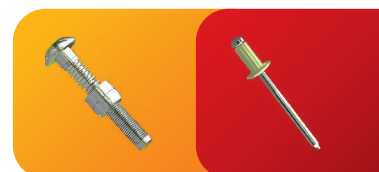

Dimensions of tool:

RL 75

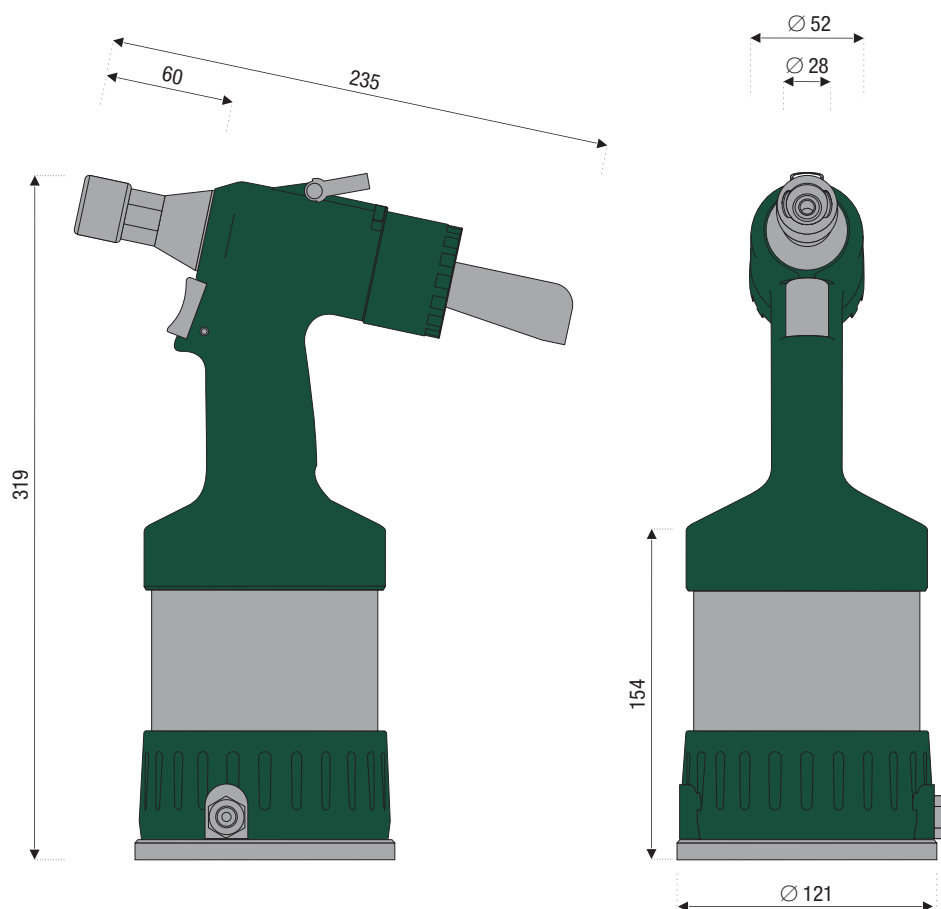

Standard accessories:

Description	Part No.
Air Joint Assembly	87-0281
Kit for Refilling of Oil	87-0187
Deflector	87-0062

Optional accessories:

Description	Part No.
Mandrel Collector Reinforced	87-0061
Ring Sensor	99-0125
Hydraulic Oil for Tool - 1 Litre	87-0188
Nose Assembly - Standard Lockbolt 6.5 mm	371705
Nose Assembly 6.5 mm	
Magna-lock, Magna-bulb, Tibulb	371815
Nose Assembly 7.8 mm	87-0294